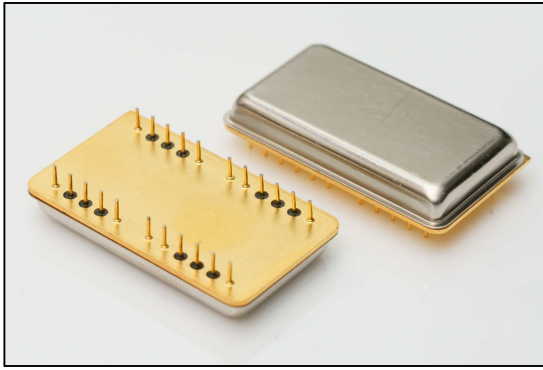


Central frequency - 35.5 MHz

Passband - 6.6 MHz


Complies with Directive 2002/95/EC (RoHS)

Looking for information on other SAW devices at: <http://aec-pro.com/filters.php>

Designed by: Ltd. AEC Design

Mass production: Ltd. AEC

## TYPICAL PERFORMANCE

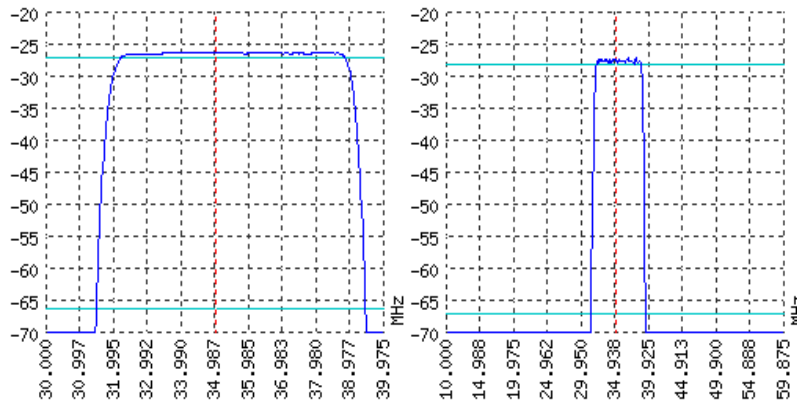


## SPECIFICATIONS

Parameter	Unit	Minimum	Typical	Maximum
Central frequency	MHz	35.3	35.5	35.7
Insertion loss	dB	25	26	27.1
Bandwidth at -1 дБ	MHz	6.2	6.6	-
Bandwidth at -40 дБ	MHz	-	8	-
Amplitude ripple	dB	-	0.5	1
Group Delay Ripple	ns	-	50	-
Ultimate rejection	dB	-	45	-
Operating temperature	°C	-55	22	+85
Substrate	-	-	Lithium niobate 128	-

## Notes:


- The design, manufacturing process, and specifications of this filter are subject to change.
- Specification valid for measurements in AEC test fixture.

## CASE DIP 24/22
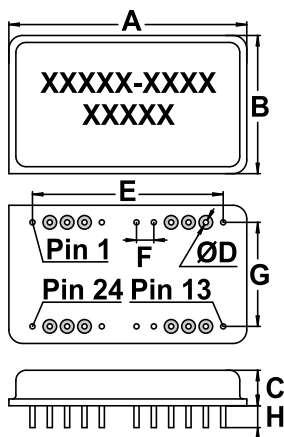
<http://aec-pro.com/cases.php>

DIMENSIONS (mm)	
A	34.85
B	20.24
C	5.2
D	0.45
E	27.94
F	2.54
G	15.24
H	3.2

## MATCHING



1,4,5,7-9,11-13,16,17,18,20,21,23,24

Input 50 Ohm		Output 50 Ohm	
L1, nH	-	L2, nH	-
C1, pF	-	C2, pF	-

Signal input: 3  
 Ground (input): 2,10  
 Signal output: 15  
 Ground (output): 14,22  
 Ground: other pin

\*Matching condition depends on PCB layout.

## Recommendations:

- Maximum permissible input signal power in the bandwidth should be less than 100 mW.
- Input signal amplitude in the stop band is limited to 5 V.
- DC voltage at the input (output) of the filter should not exceed 10 V.
- It is recommended to include the coupling capacitor between the device and the generator (load).
- SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- Do not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic cleaners.

Design and production SAW filters, resonators, delay lines, sensors.



Ltd. AEC Mass production. Acceptance - QCID.  
[aec@aec-pro.com](mailto:aec@aec-pro.com) | tel./fax (812)252-93-70



Ltd. AEC Design Design and production. Military acceptance.  
[admin@aec-design.com](mailto:admin@aec-design.com) | tel.(812)377-04-26 | fax.(812)364-60-69