

Central frequency - 1338 MHz

Passband - 22 MHz


Complies with Directive 2002/95/EC (RoHS)

Looking for information on other SAW devices at: <http://aec-pro.com/filters.php>

Designed by: Ltd. AEC Design

Mass production: Ltd. AEC

## TYPICAL PERFORMANCE

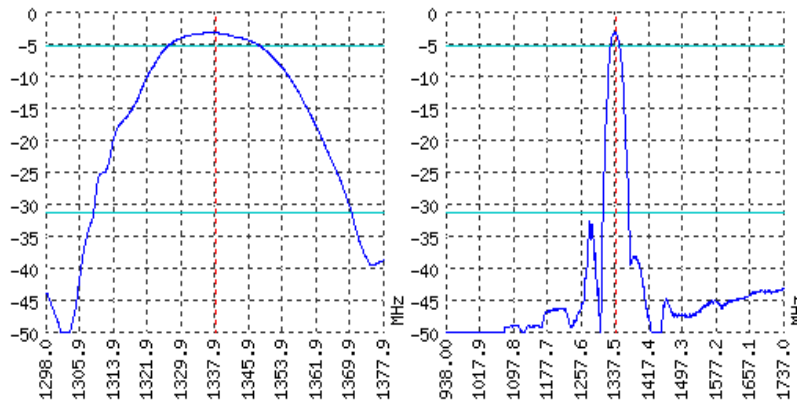


## SPECIFICATIONS

| Parameter             | Unit | Minimum | Typical              | Maximum |
|-----------------------|------|---------|----------------------|---------|
| Central frequency     | MHz  | 1337    | 1338                 | 1339    |
| Insertion loss        | dB   | -       | 2.8                  | 3.5     |
| Bandwidth at -2 дБ    | MHz  | 21      | 22                   | 23      |
| Bandwidth at -28 дБ   | MHz  | -       | 62                   | 63      |
| Amplitude ripple      | dB   | -       | 0.6                  | 1.5     |
| Group Delay Ripple    | ns   | -       | -                    | -       |
| Ultimate rejection    | dB   | -       | 40                   | -       |
| Operating temperature | °C   | -55     | 22                   | +85     |
| Substrate             | -    | -       | Lithium tantalate 36 | -       |

## Notes:


- The design, manufacturing process, and specifications of this filter are subject to change.
- Specification valid for measurements in AEC test fixture.

## CASE DCC 6

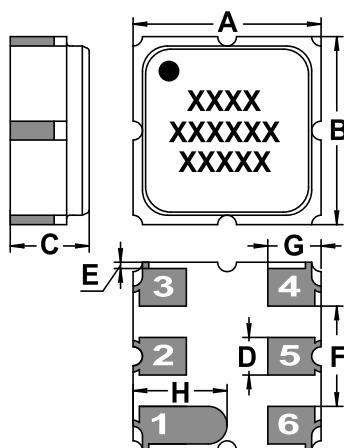
<http://aec-pro.com/cases.php>


| DIMENSIONS (mm) |      |
|-----------------|------|
| A               | 3    |
| B               | 3    |
| C               | 1.26 |
| D               | 0.6  |
| E               | 0.1  |
| F               | 1.6  |
| G               | 0.85 |
| H               | 1.5  |

## MATCHING



| Input 50 Om | Output 50 Om |
|-------------|--------------|
| L1, nH      | L2, nH       |
| C1, pF      | C2, pF       |

Signal input: 2  
Signal output: 5  
Ground: other pin

\*Matching condition depends on PCB layout.

## Recommendations:

- Maximum permissible input signal power in the bandwidth should be less than 100 mW.
- Input signal amplitude in the stop band is limited to 5 V.
- DC voltage at the input (output) of the filter should not exceed 10 V.
- It is recommended to include the coupling capacitor between the device and the generator (load).
- SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- Do not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic cleaners.

## Design and production SAW filters, resonators, delay lines, sensors.



Ltd. AEC Mass production. Acceptance - QCID.  
aec@aec-pro.com | tel./fax (812)252-93-70



Ltd. AEC Design Design and production. Military acceptance.  
admin@aec-design.com | tel.(812)377-04-26 | fax.(812)364-60-69