Central frequency - 110 MHz

Passband - 2.6 MHz


Complies with Directive 2002/95/EC (RoHS)



RREE

Looking for information on other SAW devices at: http://aec-pro.com/filters.php Designed by: Ltd. AEC Design Mass production: Ltd. AEC

TYPICAL PERFORMANCE

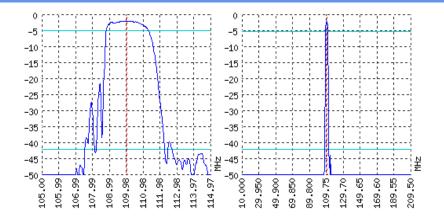

SPECIFICATIONS


Parameter	Unit	Minimum	Typical	Maximum	
Central frequency	MHz	109.85	110	110.15	
Insertion loss	dB	-	2	2.1	
Bandwidth at -3 дБ	MHz	2.4	2.6	-	
Bandwidth at -40 дБ	MHz	-	5.5	-	
Amplitude ripple	dB	-	1	3	
Group Delay Ripple	ns	-	-	-	
Ultimate rejection	dB	-	70	-	
Operating temperature	°C	-55	22	+85	
Substrate	-	-	Lithium tantalate 36	-	

Notes:

1. The design, manufacturing process, and specifications of this filter are subject to change.

2. Specification valid for measurements in AEC test fixture.

CASE DLCC 10/10-1








2.42

G



3-5.8-10

Input 50 Ом		Output 50 Ом	
L1, nH	-	L2, nH	-
C1, pF	-	C2, pF	-
Signal inp Ground (in Signal out Ground (o	nput): 2 put: 6		
Ground: o	• •		

*Matching condition depends on PCB layout.

Recommendations:

1. See the relevant UIAP for maximum permissable input signal power in the bandwidth.

2. Input signal amplitude in the stop band is limited to 5 V.

3. DC voltage at the input (output) of the filter should not exceed 10 V.

4. It is recommended to include the coupling capacitor between the device and the generator (load).

5. SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them. 6. Do not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic

cleaners

Design and production SAW filters, resonators, delay lines, sensors. Ltd. AEC Mass production. Acceptance - QCID. aec@aec-pro.com | tel./fax (812)252-93-70

Ltd. AEC Design Design and production. Military acceptance. admin@aec-design.com | tel.(812)377-04-26 | fax.(812)364-60-69

198099, Promishlennaya st., 19, St. Petersburg, Russia http://aec-pro.com

http://aec-design.com

Product catalog. © 2003-2023 Page 1/1

