

Central frequency - 200 MHz

Passband - 9.85 MHz

Mass production: Ltd. AEC

Complies with Directive 2002/95/EC (RoHS)










Looking for information on other SAW devices at: http://aec-pro.com/filters.php

Designed by: Ltd. AEC Design

TYPICAL PERFORMANCE

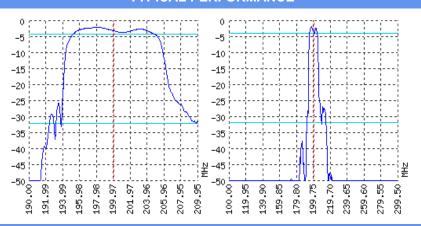


SPECIFICATIONS

Parameter	Unit	Minimum	Typical	Maximum
Central frequency	MHz	199.7	200	200.3
Insertion loss	dB	-	2	2.2
Bandwidth at -2 дБ	MHz	9	9.85	10.5
Bandwidth at -30 дБ	MHz	-	22.5	-
Amplitude ripple	dB	-	1	1.8
Group Delay Ripple	ns	-	-	-
Ultimate rejection	dB	-	50	-
Operating temperature	°C	-55	22	+85
Substrate	-	-	Lithium niobate 64	-

Notes:

- 1. The design, manufacturing process, and specifications of this filter are subject to change.
- 2. Specification valid for measurements in AEC test fixture.


CASE QCC 12B





DIMENSIONS (mm)			
Α	7		
В	5		
С	1.6		
D	2.54		
E	0.6		
F	2.54		
G	1		

MATCHING



Signal input: 10 Ground (input): 9 Signal output: 5

Input 50 Ом

L1. nH

C1, pF

Output 50 Om

L2, nH

C2, pF

Ground (output): 4 Ground: other pin

*Matching condition depends on PCB layout.

Recommendations:

- 1. Maximum permissable input signal power in the bandwidth should be less then 100 mW.
- 2. Input signal amplitude in the stop band is limited to 5 V.
- 3. DC voltage at the input (output) of the filter should not exceed 10 $\rm V.$
- 4. It is recommended to include the coupling capacitor between the device and the generator
- 5. SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- 6. Do not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic

Design and production SAW filters, resonators, delay lines, sensors.



Ltd. AEC Mass production. Acceptance - QCID. aec@aec-pro.com | tel./fax (812)252-93-70



Ltd. AEC Design Design and production. Military acceptance. admin@aec-design.com | tel.(812)377-04-26 | fax.(812)364-60-69