

Central frequency - 220 MHz

Passband - 3.1 MHz


Complies with Directive 2002/95/EC (RoHS)

Looking for information on other SAW devices at: <http://aec-pro.com/filters.php>

Designed by: Ltd. AEC Design

Mass production: Ltd. AEC

TYPICAL PERFORMANCE

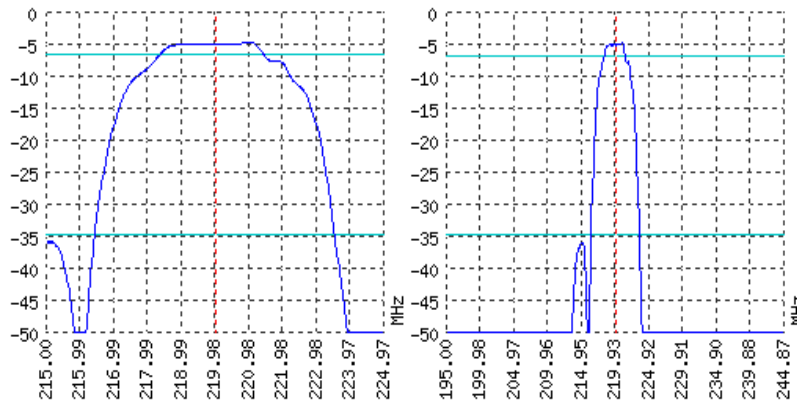

SPECIFICATIONS


| Parameter | Unit | Minimum | Typical | Maximum |
|-----------------------|------|---------|---------------------|---------|
| Central frequency | MHz | 219.7 | 220 | 220.3 |
| Insertion loss | dB | - | 4.6 | 6 |
| Bandwidth at -2 дБ | MHz | 2.9 | 3.1 | 3.5 |
| Bandwidth at -30 дБ | MHz | - | 7.1 | - |
| Amplitude ripple | dB | - | 1.5 | 2 |
| Group Delay Ripple | ns | - | - | - |
| Ultimate rejection | dB | - | 40 | - |
| Operating temperature | °C | -55 | 22 | +85 |
| Substrate | - | - | Lithium niobate 128 | - |

Notes:


- The design, manufacturing process, and specifications of this filter are subject to change.
- Specification valid for measurements in AEC test fixture.

CASE H 16.48-2BH

MATCHING

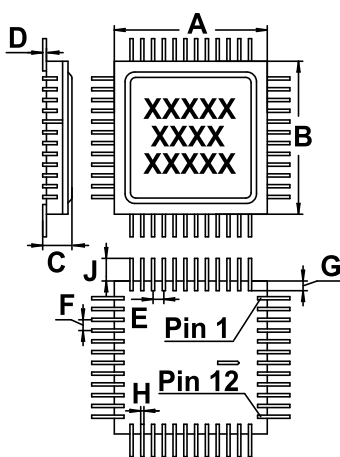
<http://aec-pro.com/cases.php>


| DIMENSIONS (mm) | |
|-----------------|------|
| A | 14.2 |
| B | 14.2 |
| C | 2.9 |
| D | 0.2 |
| E | 1 |
| F | 1 |
| G | 0.9 |
| H | 0.3 |
| J | 3 |



| Input 50 Om | Output 50 Om |
|-------------|--------------|
| L1, nH | L2, nH |
| C1, pF | C2, pF |

Signal input: 6
 Ground (input): 4,5
 Signal output: 36
 Ground (output): 32,33
 Ground: other pin

*Matching condition depends on PCB layout.

Recommendations:

- Maximum permissible input signal power in the bandwidth should be less than 100 mW.
- Input signal amplitude in the stop band is limited to 5 V.
- DC voltage at the input (output) of the filter should not exceed 10 V.
- It is recommended to include the coupling capacitor between the device and the generator (load).
- SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- Do not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic cleaners.

Design and production SAW filters, resonators, delay lines, sensors.



Ltd. AEC Mass production. Acceptance - QCID.
aec@aec-pro.com | tel./fax (812)252-93-70



Ltd. AEC Design Design and production. Military acceptance.
admin@aec-design.com | tel.(812)377-04-26 | fax.(812)364-60-69