

Central frequency - 306 MHz

Passband - 14 MHz

Mass production: Ltd. AEC

Complies with Directive 2002/95/EC (RoHS)










Looking for information on other SAW devices at: http://aec-pro.com/filters.php

Designed by: Ltd. AEC Design

TYPICAL PERFORMANCE

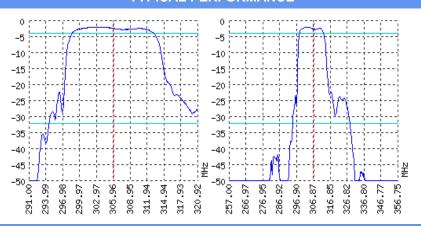


SPECIFICATIONS

Parameter	Unit	Minimum	Typical	Maximum
Central frequency	MHz	305	306	306.5
Insertion loss	dB	1.8	1.9	2
Bandwidth at -2 дБ	MHz	13.5	14	14.5
Bandwidth at -30 дБ	MHz	-	34	-
Amplitude ripple	dB	-	0.9	1.5
Group Delay Ripple	ns	-	-	-
Ultimate rejection	dB	-	60	-
Operating temperature	°C	-55	22	+85
Substrate	-	-	Lithium niobate 64	-

Notes:


- 1. The design, manufacturing process, and specifications of this filter are subject to change.
- 2. Specification valid for measurements in AEC test fixture.

CASE SIP4M





DIMENSI	DIMENSIONS (mm)				
Α	10.8				
В	4.3				
С	3.3				
D	0.45				
Е	1.59				
F	2.15				
G	3.2				
Н	2.54				



Input 50 Ом		Output 50 Ом		
L1, nH	-	L2, nH	-	
C1, pF	-	C2, pF	-	

Signal input: 1 Signal output: 4 Ground: other pin

*Matching condition depends on PCB layout.

Recommendations:

- 1. See the relevant $\ensuremath{\mathsf{L}\Pi\mathsf{AP}}$ for maximum permissable input signal power in the bandwidth.
- 2. Input signal amplitude in the stop band is limited to 5 V.
- 3. DC voltage at the input (output) of the filter should not exceed 10 V.
- It is recommended to include the coupling capacitor between the device and the generator (load).

MATCHING

- 5. SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- 6. Do not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic cleaners.

Design and production SAW filters, resonators, delay lines, sensors.



Ltd. AEC Mass production. Acceptance - QCID. aec@aec-pro.com | tel./fax (812)252-93-70



Ltd. AEC Design Design and production. Military acceptance. admin@aec-design.com | tel.(812)377-04-26 | fax.(812)364-60-69