

Central frequency - 1728 MHz

Passband - 26 MHz

Mass production: Ltd. AEC

Complies with Directive 2002/95/EC (RoHS)










Looking for information on other SAW devices at: http://aec-pro.com/filters.php

Designed by: Ltd. AEC Design

### TYPICAL PERFORMANCE

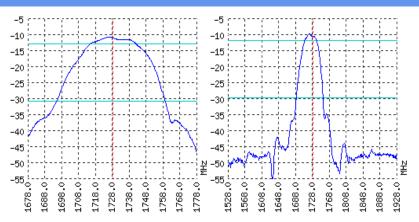

### **SPECIFICATIONS**


Parameter	Unit	Minimum	Typical	Maximum
Central frequency	MHz	1727	1728	1729
Insertion loss	dB	-	11	12
Bandwidth at -2 дБ	MHz	25	26	-
Bandwidth at -20 дБ	MHz	-	62	-
Amplitude ripple	dB	-	0.9	1.8
Group Delay Ripple	ns	-	3	5
Ultimate rejection	dB	-	35	-
Operating temperature	°C	-55	22	+85
Substrate	-	-	Lithium niobate 64	-

#### Notes:

- 1. The design, manufacturing process, and specifications of this filter are subject to change.
- 2. Specification valid for measurements in AEC test fixture.


CASE SIP4M

# XXXX-XXXX **XXXXX**





DIMENSIONS (mm)				
Α	10.8			
В	4.3			
C	3.3			
D	0.45			
Е	1.59			
F	2.15			
G	3.2			
Н	2.54			



Input 50 Ом		Output 50 Ом	
L1, nH	-	L2, nH	-
C1, pF	-	C2, pF	-

Signal output: 4 Ground: other pin

\*Matching condition depends on PCB layout.

## Recommendations:

- 1. See the relevant ЦПАР for maximum permissable input signal power in the bandwidth.
- 2. Input signal amplitude in the stop band is limited to 5 V.
- 3. DC voltage at the input (output) of the filter should not exceed 10 V.
- 4. It is recommended to include the coupling capacitor between the device and the generator

**MATCHING** 

- 5. SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- 6. Do not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic

# Design and production SAW filters, resonators, delay lines, sensors.



Ltd. AEC Mass production. Acceptance - QCID. aec@aec-pro.com | tel./fax (812)252-93-70



Ltd. AEC Design Design and production. Military acceptance. admin@aec-design.com | tel.(812)377-04-26 | fax.(812)364-60-69