

Central frequency - 137.5 MHz

### Passband - 7 MHz

Complies with Directive 2002/95/EC (RoHS)










Looking for information on other SAW devices at: http://aec-pro.com/filters.php

Designed by: Ltd. AEC Design

## Mass production: Ltd. AEC TYPICAL PERFORMANCE

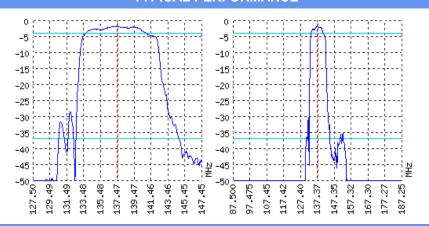


#### **SPECIFICATIONS**

Parameter	Unit	Minimum	Typical	Maximum
Central frequency	MHz	137.25	137.5	137.75
Insertion loss	dB	-	1.7	2
Bandwidth at -2 дБ	MHz	6.9	7	-
Bandwidth at -35 дБ	MHz	-	13.5	14
Amplitude ripple	dB	-	0.8	1
Group Delay Ripple	ns	-	-	-
Ultimate rejection	dB	-	50	-
Operating temperature	°C	-55	22	+85
Substrate	-	<u>-</u>	Lithium niobate 49	-

#### Notes:


- 1. The design, manufacturing process, and specifications of this filter are subject to change.
- 2. Specification valid for measurements in AEC test fixture.

# CASE QCC 10-1





DIMENSIONS (mm)				
Α	9.1			
В	7.1			
С	1.61			
D	2.54			
Е	5.08			
F	0.8			
G	1.2			
Н	0.2			
J	1.1			



Input 50 Ом		Output 50 Ом			
L1, nH	150	L2, nH	150		
C1, pF	36	C2, pF	36		
Signal input: 1					

Ground (input): 8 Signal output: 6 Ground (output): 3 Ground: other pin

\*Matching condition depends on PCB layout.

## Recommendations:

1. Maximum permissable input signal power in the bandwidth should be less then 100 mW.

**MATCHING** 

- 2. Input signal amplitude in the stop band is limited to 5 V.
- 3. DC voltage at the input (output) of the filter should not exceed 10 V.
- 4. It is recommended to include the coupling capacitor between the device and the generator
- 5. SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- 6. Do not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic

## Design and production SAW filters, resonators, delay lines, sensors.



Ltd. AEC Mass production. Acceptance - QCID. aec@aec-pro.com | tel./fax (812)252-93-70

6



Ltd. AEC Design Design and production. Military acceptance. admin@aec-design.com | tel.(812)377-04-26 | fax.(812)364-60-69