

Central frequency - 313.5 MHz

Passband - 12 MHz

Mass production: Ltd. AEC

Complies with Directive 2002/95/EC (RoHS)










Looking for information on other SAW devices at: http://aec-pro.com/filters.php

Designed by: Ltd. AEC Design

TYPICAL PERFORMANCE

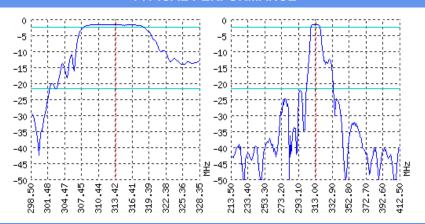


SPECIFICATIONS


Parameter	Unit	Minimum	Typical	Maximum
Central frequency	MHz	313.2	313.5	313.75
Insertion loss	dB	1.1	1.3	1.5
Bandwidth at -1 дБ	MHz	11.85	12	12.5
Bandwidth at -20 дБ	MHz	-	41	-
Amplitude ripple	dB	0.2	0.3	0.5
Group Delay Ripple	ns	-	-	-
Ultimate rejection	dB	-	40	-
Operating temperature	°C	-55	22	+85
Substrate	-	-	Lithium niobate 64	-


Notes:

- 1. The design, manufacturing process, and specifications of this filter are subject to change.
- 2. Specification valid for measurements in AEC test fixture.

CASE H 04.16-2BH

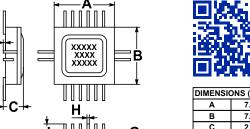





Input 50 Ом		Output 50 Ом	
L1, nH	-	L2, nH	-
C1, pF		C2, pF	
Cianal inn	2		

Ground (input): 2,5
Signal output: 11
Ground (output): 10,13
Ground: other pin

*Matching condition depends on PCB layout.

Recommendations:

- 1. See the relevant $\ensuremath{\mathsf{L}\Pi\mathsf{AP}}$ for maximum permissable input signal power in the bandwidth.
- 2. Input signal amplitude in the stop band is limited to 5 V.
- 3. DC voltage at the input (output) of the filter should not exceed 10 V.
- It is recommended to include the coupling capacitor between the device and the generator (load).

MATCHING

- 5. SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- $6.\ \mbox{Do}$ not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic cleaners.

Design and production SAW filters, resonators, delay lines, sensors.



Ltd. AEC Mass production. Acceptance - QCID. aec@aec-pro.com | tel./fax (812)252-93-70

Pin 16



Ltd. AEC Design Design and production. Military acceptance. admin@aec-design.com | tel.(812)377-04-26 | fax.(812)364-60-69