

Central frequency - 140 MHz

Passband - 43 MHz

Mass production: Ltd. AEC

Complies with Directive 2002/95/EC (RoHS)










Looking for information on other SAW devices at: http://aec-pro.com/filters.php

Designed by: Ltd. AEC Design

TYPICAL PERFORMANCE

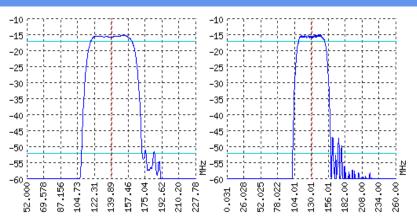

SPECIFICATIONS

Parameter	Unit	Minimum	Typical	Maximum
Central frequency	MHz	139.75	140	140.25
Insertion loss	dB	15	15.5	16
Bandwidth at -2 дБ	MHz	41	43	-
Bandwidth at -37 дБ	MHz	-	64	-
Amplitude ripple	dB	-	1	2
Group Delay Ripple	ns	-	-	-
Ultimate rejection	dB	-	50	-
Operating temperature	°C	-55	22	+85
Substrate	-	-	Lithium niobate 128	-

Notes:

- 1. The design, manufacturing process, and specifications of this filter are subject to change.
- 2. Specification valid for measurements in AEC test fixture.


XXXXX


XXXXXX

XXXXX

CASE QCC 10-1







Input 50 Ом		Output 50 Ом		
L1, nH	27	L2, nH	33	
L3, nH	56	L4, nH	68	

Signal input: 1 Signal output: 6 Ground: other pin

*Matching condition depends on PCB layout.

Recommendations:

Maximum permissable input signal power in the bandwidth should be less then 100 mW.

MATCHING

- 2. Input signal amplitude in the stop band is limited to 5 V.
- 3. DC voltage at the input (output) of the filter should not exceed 10 V.
- It is recommended to include the coupling capacitor between the device and the generator (load).
- SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- 6. Do not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic cleaners.

Design and production SAW filters, resonators, delay lines, sensors.



Ltd. AEC Mass production. Acceptance - QCID. aec@aec-pro.com | tel./fax (812)252-93-70

6



Ltd. AEC Design Design and production. Military acceptance. admin@aec-design.com | tel.(812)377-04-26 | fax.(812)364-60-69