

Central frequency - 263.7 MHz

Passband - 4.5 MHz

Mass production: Ltd. AEC

Complies with Directive 2002/95/EC (RoHS)








Looking for information on other SAW devices at: http://aec-pro.com/filters.php

Designed by: Ltd. AEC Design

TYPICAL PERFORMANCE

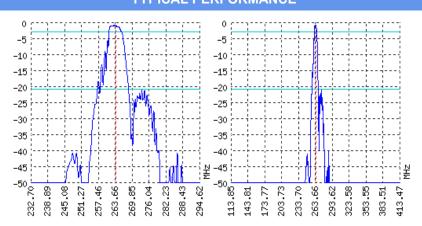


SPECIFICATIONS

Parameter	Unit	Minimum	Typical	Maximum
Central frequency	MHz	263.5	263.7	263.9
Insertion loss	dB	0.9	1.1	1.3
Bandwidth at -2 дБ	MHz	4.4	4.5	5
Bandwidth at -20 дБ	MHz	-	11.3	11.8
Amplitude ripple	dB	-	1.5	2
Group Delay Ripple	ns	-	-	-
Ultimate rejection	dB	-	50	-
Operating temperature	°C	-55	22	+85
Substrate	-	-	Lithium tantalate 36	-

Notes:


- 1. The design, manufacturing process, and specifications of this filter are subject to change.
- 2. Specification valid for measurements in AEC test fixture.

CASE QCC 8 MATCHING





DIMENSIONS (mm)				
Α	5			
В	5			
С	1.4			
D	1.27			
E	0.1			
F	1.27			
G	0.64			
Н	2.08			



L1, nH	-	L2, nH					
C1, pF	-	C2, pF					
Signal input: 2 Ground (input): 1,3							

Output 50 Ом

Ground (input): 1,3 Signal output: 6 Ground (output): 5,7 Ground: other pin

Input 50 Ом

*Matching condition depends on PCB layout.

Recommendations:

- Maximum permissable input signal power in the bandwidth should be less then 100 mW.
- 2. Input signal amplitude in the stop band is limited to 5 V.
- 3. DC voltage at the input (output) of the filter should not exceed 10 V.
- It is recommended to include the coupling capacitor between the device and the generator (load).
- SAW filters are sensitive to static electricity, therefore corresponding precautions should be taken while working with them.
- $6.\ \mbox{Do}$ not expose the device to frequency vibrations more than 5 kHz. Do not use ultrasonic cleaners.

Design and production SAW filters, resonators, delay lines, sensors.



Ltd. AEC Mass production. Acceptance - QCID. aec@aec-pro.com | tel./fax (812)252-93-70



Ltd. AEC Design Design and production. Military acceptance. admin@aec-design.com | tel.(812)377-04-26 | fax.(812)364-60-69